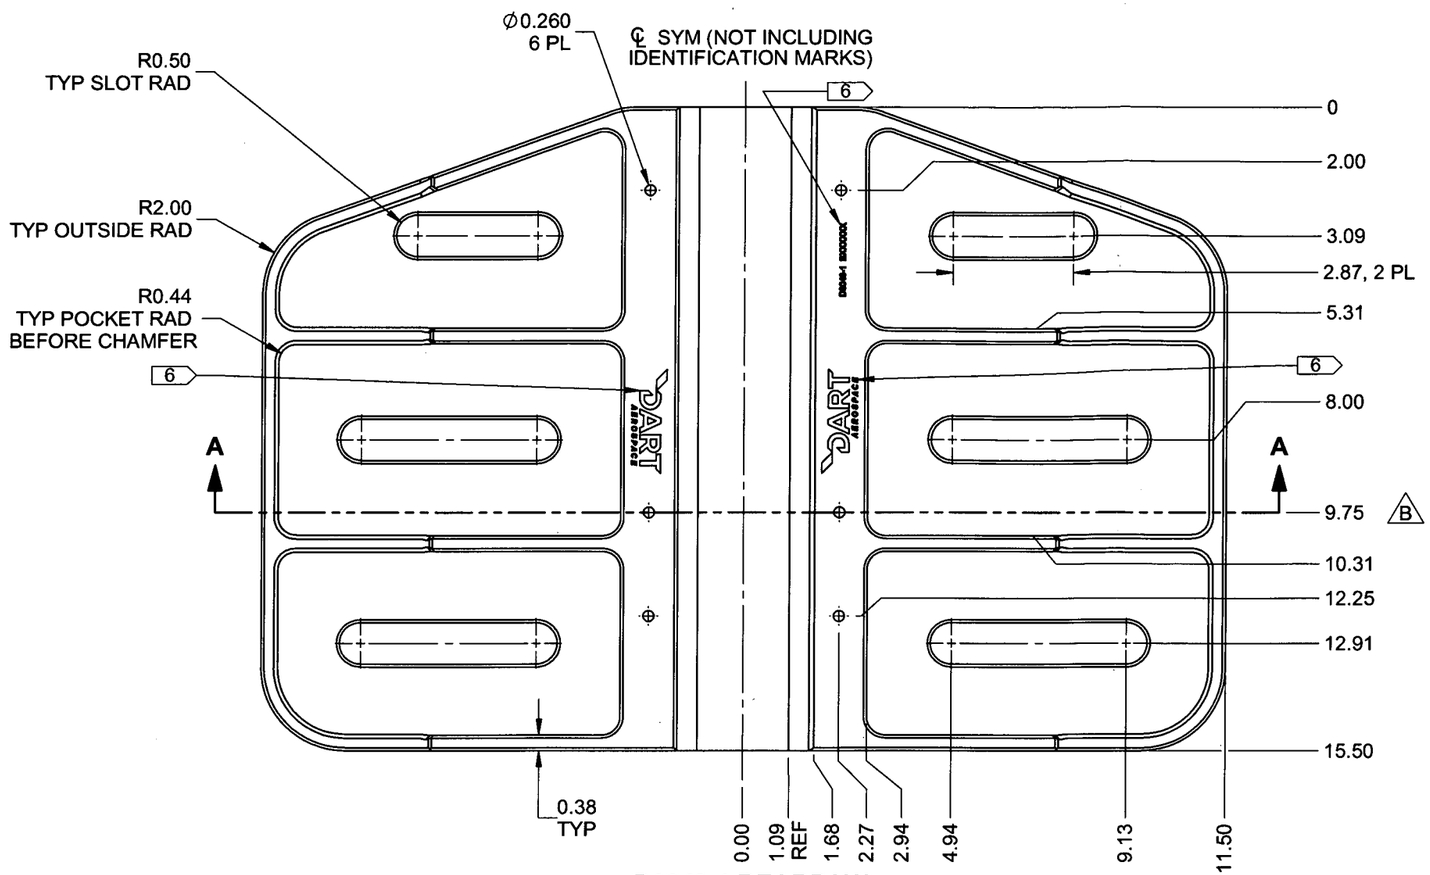

D3049-1 BEARPAW

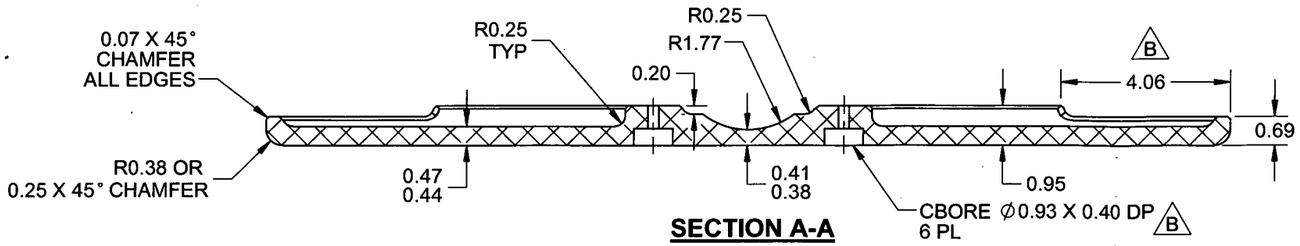

SECTION A-A

NOTES:

1) MATERIAL: UHMW BLACK TIVAR 1000 VIRGIN MATERIAL, 1.00 THICK MACHINED TO 0.95
(REF DART SPEC. MUHMWB10)
2) FINISH: NONE
3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
4) UNITS: INCHES UNLESS OTHERWISE NOTED
5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
6) IDENTIFICATION: ENGRAVE DART LOGO, PART NUMBER "D3049-1" AND BATCH NUMBER "BXXXXX" IN ACCORDANCE WITH QSI 044 METHOD 6.3 TO MAX DEPTH OF 0.012 AS ILLUSTRATED
7) WEIGHT: 5.94 lbs
8) NON DIMENSIONED FEATURES PER CAD FILE "D3049-1-REVB.STP"

RELEASED
2016-07-26
ECN 16-591

APPROVED

REV.	DESCRIPTION	BY	DATE
B	REVISE DWG TO CURRENT STANDARDS, ADDED 2 ADDITIONAL CBORE HOLES ZN C6-1, UPDATE DIM'S DUE TO CAD ERROR; Ø0.93 WAS Ø0.75	ML	16.06.01
A	NEW ISSUE	RF	01.10.18

DESIGN	ML	**DART AEROSPACE USA, INC.** EUGENE, OR
DRAWN	ML	
CHECKED	DB	DRAWING NO. D3049 — REV. B — SHEET 1 OF 1
MFG. APPR.	JLM	
APPROVED	HS	TITLE BEARPAW — SCALE NTS
DE APPR.	DS	
DATE	16.06.01	

COPYRIGHT © 2001 BY DART AEROSPACE USA, INC.
THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE USA, INC.